


PC/TMS



Motorreductores
Combinados de
Engranajes y
Sinfin y Corona

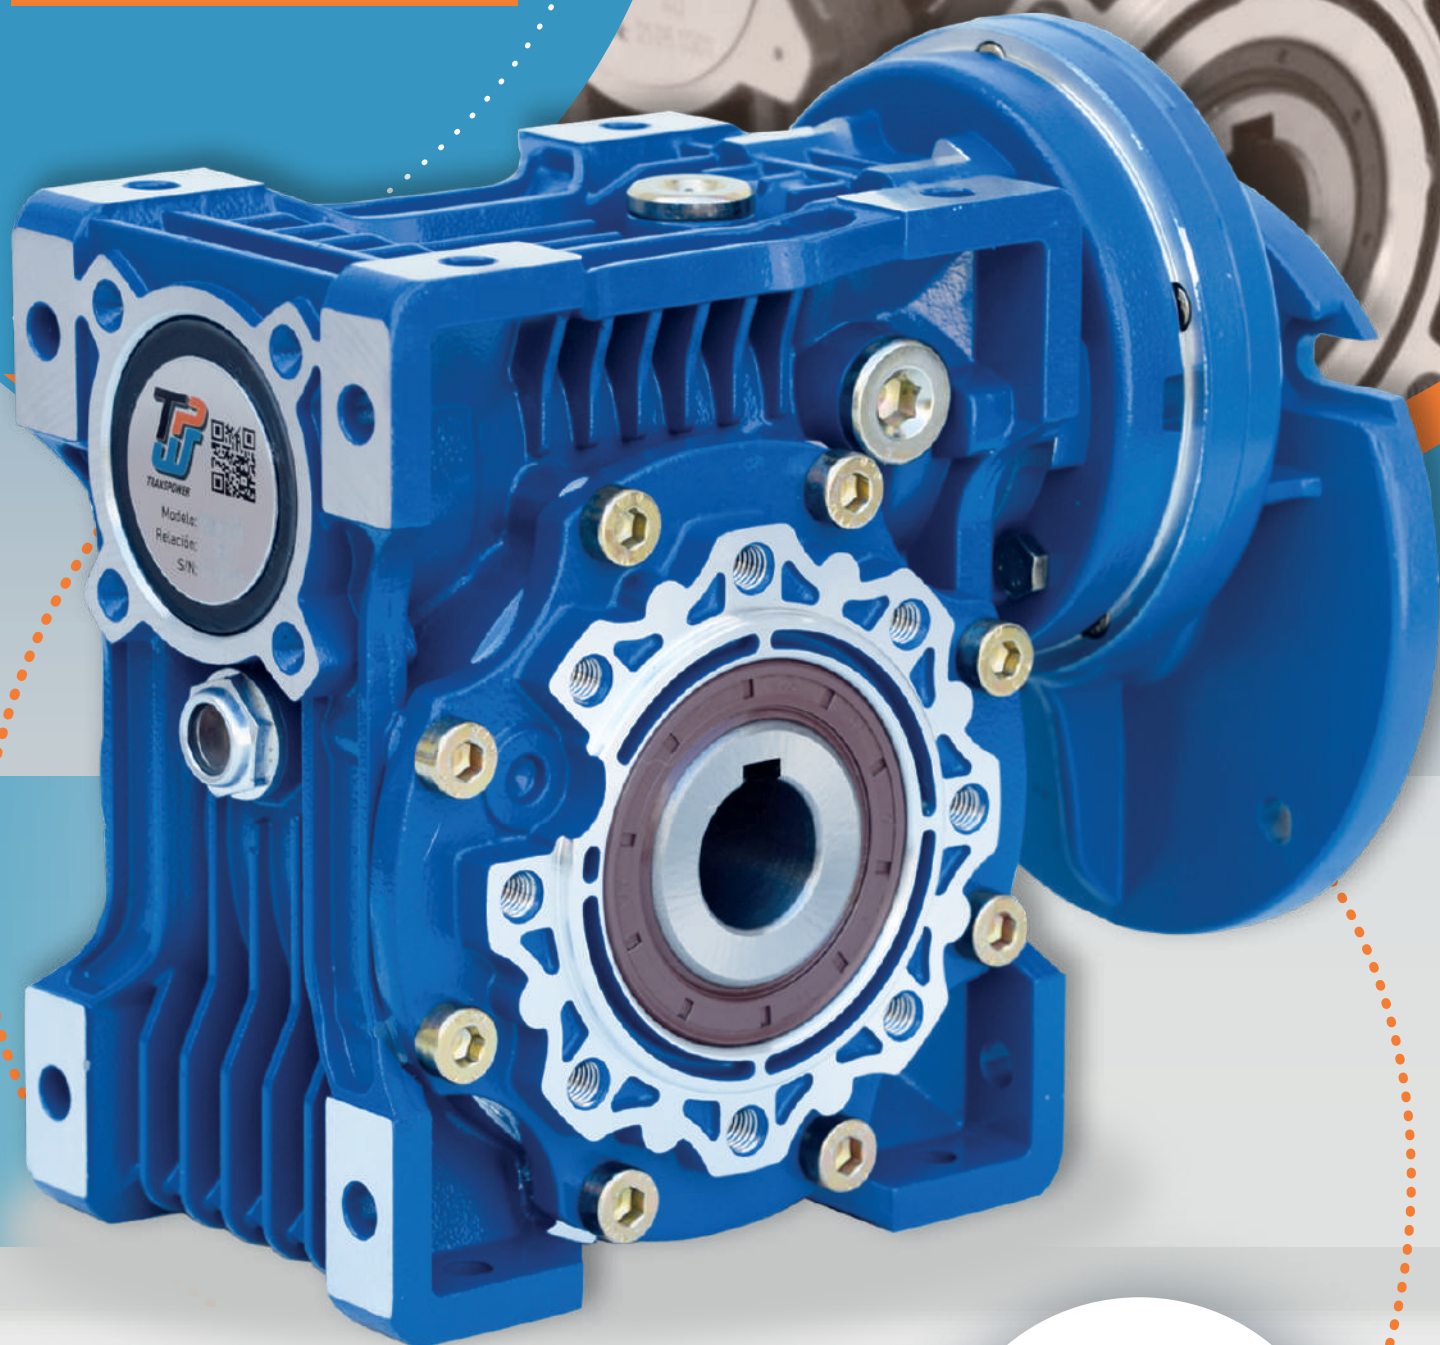


Tablas de selección para motores de 1.400 r.p.m.


Datos de la Unidad Reductora						
Potencia (HP)	n ₂ (r.p.m.)	12	10	7,5	6	5
	Relación i	120	150	180	240	300
0,16	Reductor	PC063/040	PC063/050	PC063/050	PC063/063	PC063/063
	M ₂ (Kgmf)	5,7	6,8	7,5	9,2	10,3
0,25	Reductor	PC063/050	PC063/050	PC063/063	PC063/063	PC063/063
	M ₂ (Kgmf)	8,7	10,1	11,7	13,9	15,5
0,33	Reductor	PC071/063	PC071/063	PC071/063	PC071/075	PC071/075
	M ₂ (Kgmf)	12,5	14,3	16,3	20,1	23
0,5	Reductor	PC071/063	PC071/075	PC071/075	PC071/090	PC071/090
	M ₂ (Kgmf)	18,5	22,3	25,4	32,1	37,1
0,75	Reductor	PC080/075	PC080/090	PC080/090	PC080/090	
	M ₂ (Kgmf)	28,4	35,5	39,8	47,7	
1	Reductor	PC080/090	PC080/090	PC080/110	PC090/110	
	M ₂ (Kgmf)	40,5	48,3	58	70,2	
1,5	Reductor	PC090/110	PC090/110	PC090/130	PC090/130	
	M ₂ (Kgmf)	59,9	68,6	84,3	96,2	
2	Reductor	PC090/110	PC090/130	PC090/130		
	M ₂ (Kgmf)	81,7	93,6	114,9		

n₂ (r.p.m.) - Velocidad en el eje de salida.
M₂ (Kgmf) - Momento torsor máximo de salida para el motor indicado.

POR POTENCIAS Y RELACIONES QUE NO FIGURAN EN TABLA,
POR FAVOR CONSULTAR A NUESTRO DEPARTAMENTO TÉCNICO.

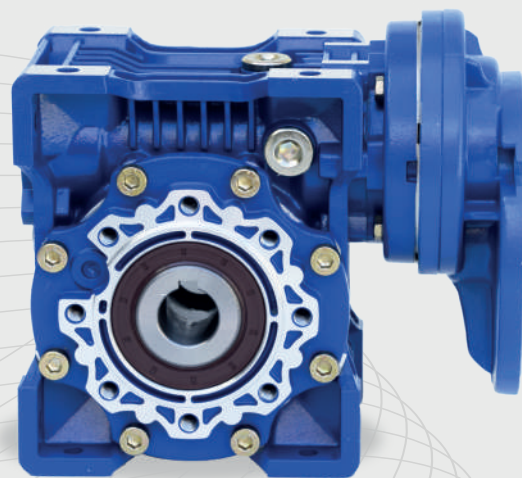


Dimensiones Generales

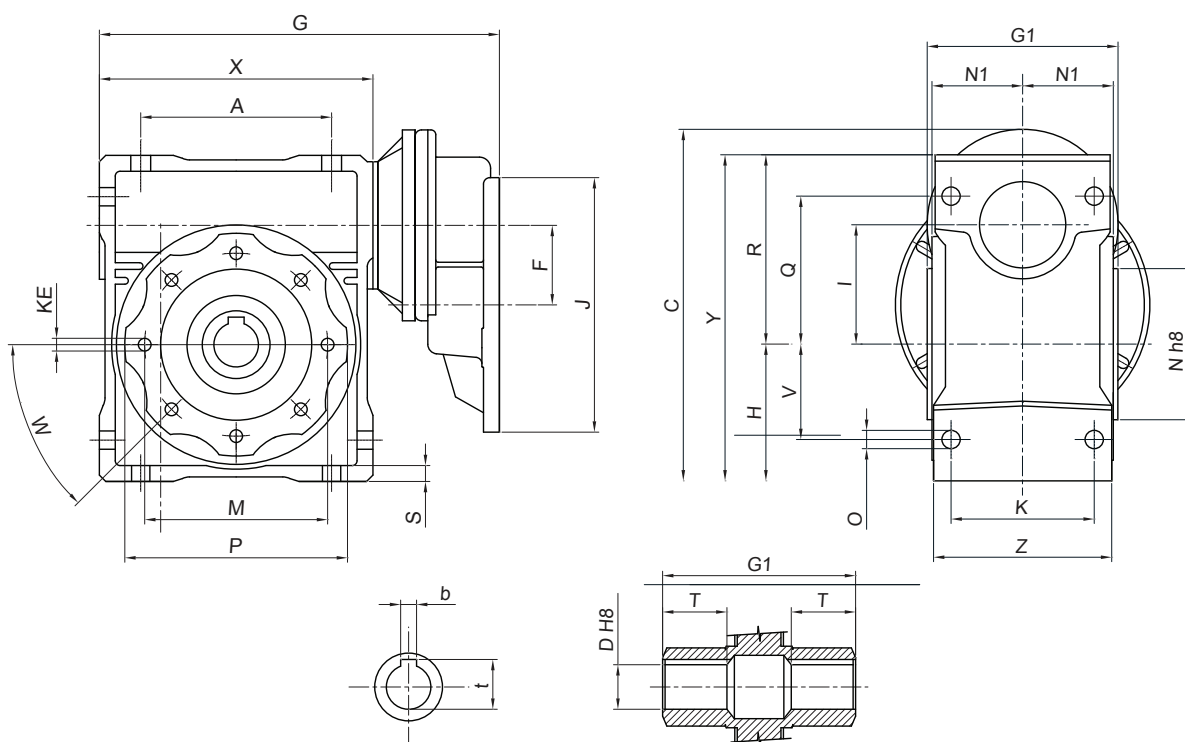

Dimensiones Generales

	PC 063/040	PC 063/050	PC 063/063	PC 071/063	PC 071/075	PC 071/090	PC 080/075	PC 080/090	PC 080/110	PC 080/130
									PC 090/110	PC 090/130
A	70	80	100	100	120	140	120	140	170	200
G	165	185	212	220	251.5	285.5	267.5	301.5	356,5	396,5
C	150	170	195	202	228	269	241	273	317,5	317,5
D	18	25	25	25	28	35	28	35	42	45
F	140	140	140	160	160	160	200	200	200	300
G	165	185	212	220	251,5	285,5	267,5	301,5	356,5	396,5
G1	78	92	112	112	120	140	120	140	155	170
H	50	60	72	72	86	103	86	103	127,5	147,5
I	40	50	63	63	75	90	75	90	110	130
J	40	40	40	50	50	50	63	63	63	63
K	60	70	85	85	90	100	90	100	115	120
KE	M6 x 10n.4	M8 x 14n.4	M8 x 14n.8	M8 x 14n.8	M8 x 14n.8	M8 x 18n.8	M8 x 14n.8	M10 x 18n.8	M10 x 18n.8	M12 x 21n.8
M	75	85	95	95	115	130	115	130	165	215
N	60	70	80	82	95	110	95	110	130	180
N1	36,5	43,5	53	53	57	67	57	67	74	81
O	6,5	8,5	8,5	8,5	11,5	13	11,5	13	14	16
P	87	100	110	110	140	160	140	160	200	250
Q	55	64	80	80	93	102	93	102	125	140
R	71,5	84	102	102	119	135	119	135	167,5	187,5
S	6,5	7	8	8	10	11	10	11	14,5	15,5
T	26	30	36	36	40	45	40	45	50	60
V	35	40	50	50	60	70	60	70	85	100
W	90 °	90 °	45 °	45 °	45 °	45 °	45 °	45 °	45 °	45 °
X	100	120	144	144	172	206	172	206	255	295
Y	121,5	144	174	174	205	238	205	238	295	335
Z	71	85	103	103	112	130	112	130	144	155
b	6	8	8	8	8	10	8	10	12	14
t	20,5	27,9	27,9	27,9	30,9	38,3	30,9	38,3	45,1	48,5

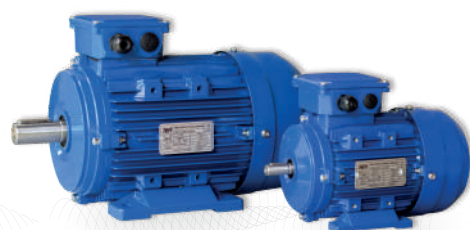

Motores Eléctricos



Variadores Electrónicos de Velocidad



Cadenas Industriales

